

Spence Doors Technical Detail

Spence Fully Encapsulated Health Care Solution Doors

Core Material


- Particleboard/HMR Particleboard - both can be used internally or externally. Most common facing internally would be PQ MDF.
- Blockboard (Solid Timber) - Can be used internally or externally but is normally used in external application.
- Spence 'Eco-Light' or other light-weight core options
- Sustainable Source options
- LVL

Standard Thickness (nominal)

- 35mm
- 40mm
- 45mm
- Special thicknesses available on request (may restrict use of ABS Edging)

Door Face Options

- HPL (High Pressure Laminate)
 - Solid colours
 - Textures / Woodgrain look
- CPL (Continuous Pressed Laminate)
 - Solid colours
 - Textures / Woodgrain look

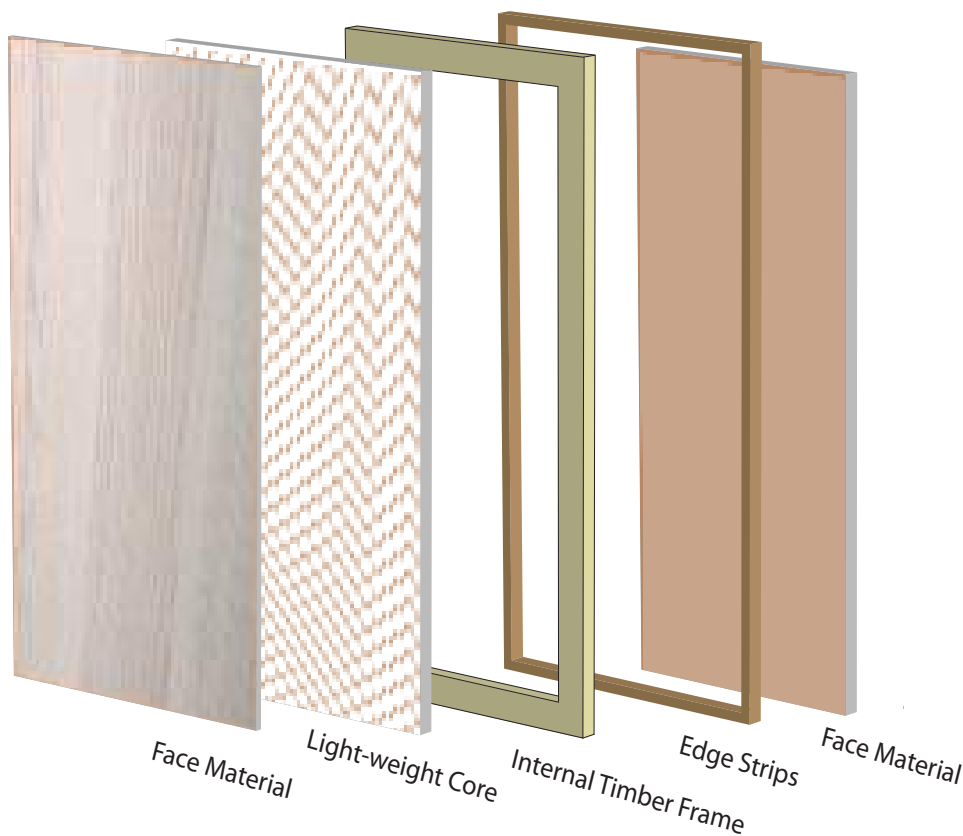

Spence Doors Technical Detail

Spence Fully Encapsulated Health Care Solution Doors



Door Edging Options

- ABS (Acrylic) Edging
- 12mm Hardwood Edge Strips
(this inhibits full encapsulation)



Optional Extra

- Aluminium View Panel
 - Fully nished; nil painting required
 - Can be retro-tted
 - 600 x 200 & 450 x 200 as stock size
(some other sizes on request)