
Timber Frames

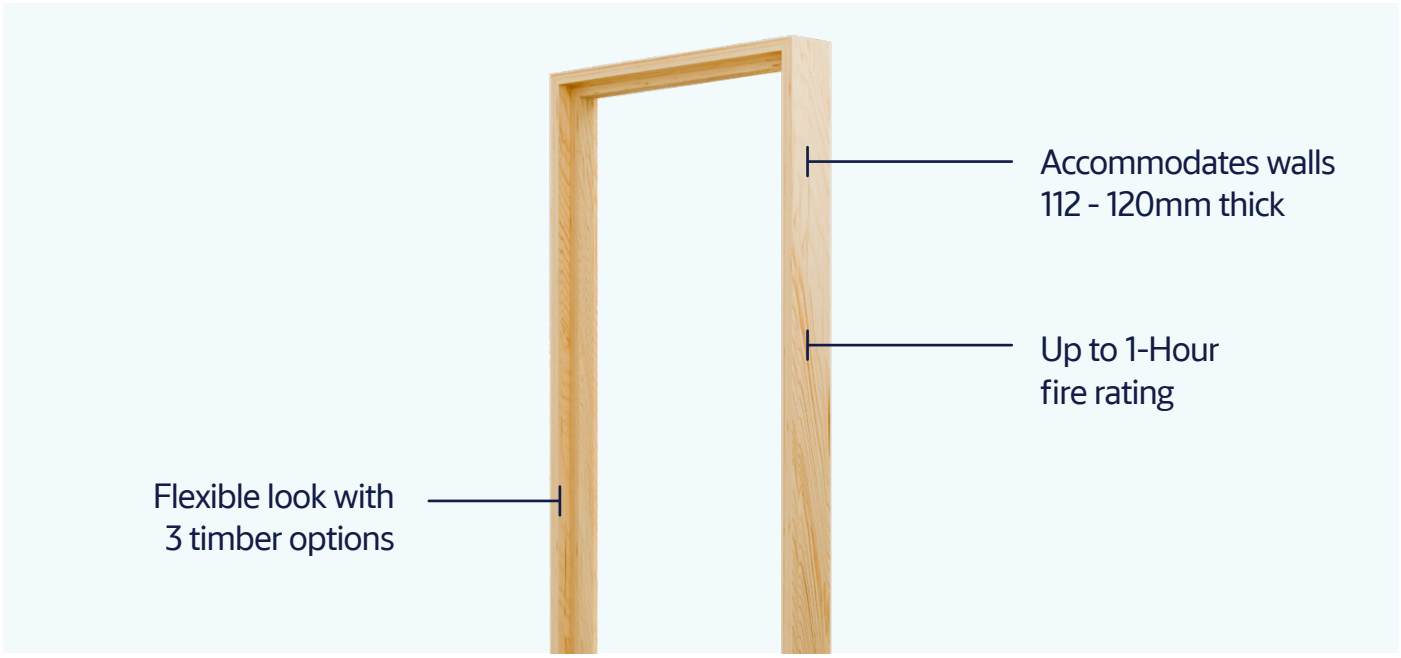

Performance

Solid Build
Timber is a natural insulator with high material density. Backfilling for rated doors is not required with timber frames as it is naturally solid.

Natural Finish
Timber hosts a naturally warm finish that opens up design possibilities. Spence Doors offer three timber options with each delivering its own distinct look ready for painting or staining.

Rugged
Options include durable materials resistant to impact damage, a reliable choice for residential and commercial application alike.

Sizing

Door Height:
2100mm - 3000mm (2700mm maximum in fire-rated doors)

Door Width:
720mm - 1500mm (1020mm maximum in fire-rated doors)

Wall Thickness:
112mm - 120mm

Door stops: 25mm x 45mm (minimum)
Architraves: 19mm thick x 40mm wide (minimum)

Material Options

Pine

A warm timber finish with great moisture resistance properties. For internal application only.



MDF

Engineered wood with a smooth finish. Suited to budget projects. For low moisture settings only.



Hardwood


Very sturdy material with premium aesthetic. For internal & sheltered external application.



Variants


Pre-Hung

Standard option featuring bespoke frame. Fit with corner brackets and spreader bar for safe transit.

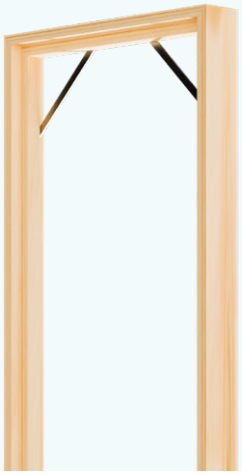

Knock-Down

Supplied as flat-pack with hinge cutouts prepared. Jambs & stops not pre-fixed; allows door thickness to be accurately measured on-site.

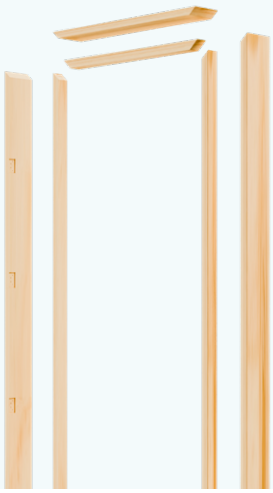


Rating

Fire-Rated:
Up to 1-hour with appropriate profile.


Acoustic Rated:
Certified with appropriate seals.

Non-Rated Profiles


SDT 120

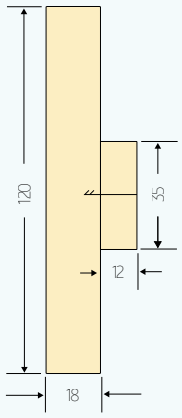


Custom / Double Rebate

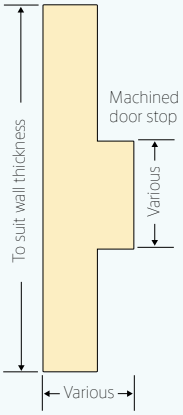

SDT 112

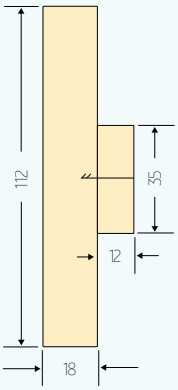

Custom / Single Rebate

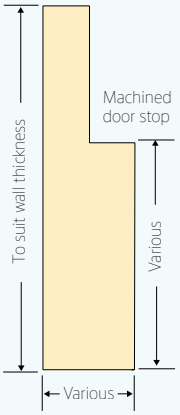

Custom / Not Fixed

