
Ventilation Grilles

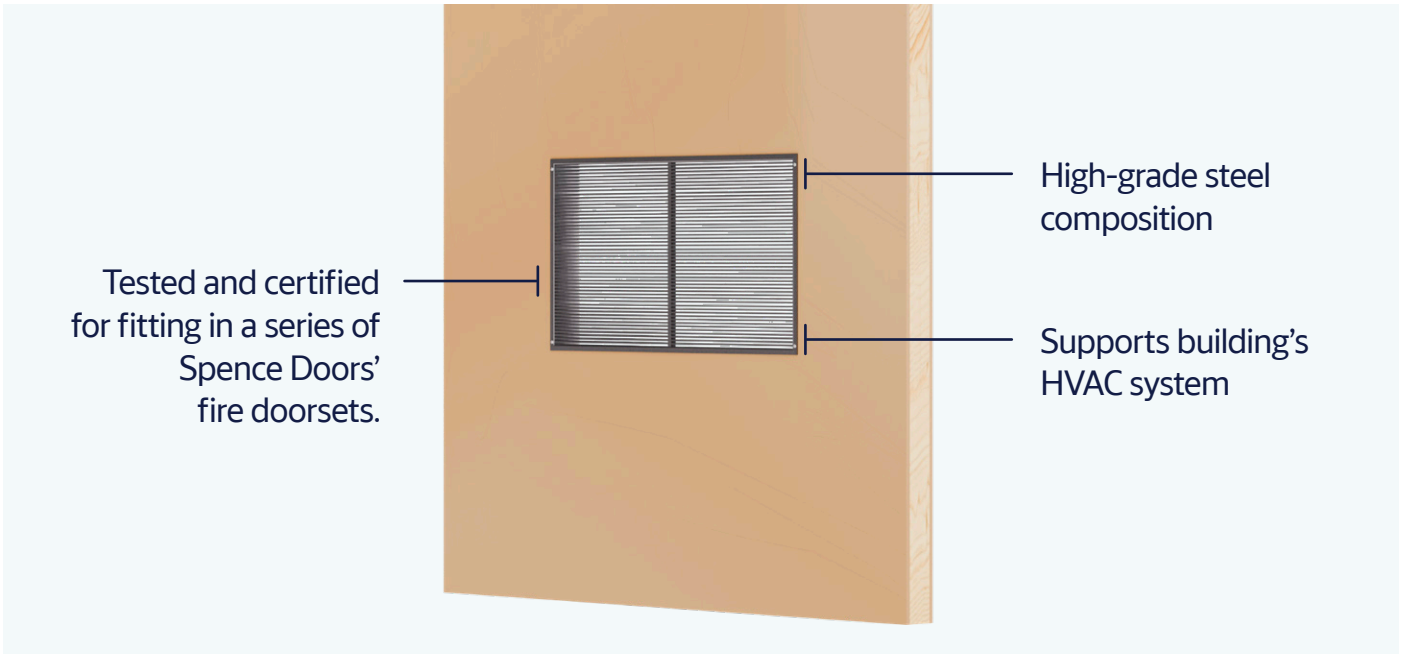

Details

Material:
Steel

Application:
For internal use only. Appropriate weather proof treatment (third-party sourced) required for exterior / outdoor application.

Sizing (Non-Rated Door Sets):
Custom

Performance

HVAC Support
The slatted grille manages airflow between spaces, ensuring an appropriate flow is achieved between rooms. Subsequent air circulation maintains temperature control and can reduce door closing pressure on enclosed rooms.

Simple Install
Designed for easy fitting, or Spence Doors can prepare the door leaf and fit the grille during manufacturing stage.

Sizing (For Fire Doors)

Ventilation Grilles are tested and certified for fitting in certain configurations of Spence Doors' Fire Doorsets in accorance with AS1530.4 2014.

Approved Sizes:
600mm x 600mm
600mm x 300mm*
450mm x 450mm*
300mm x 300mm*

* Grilles to be installed at a minimum of 500mm from the bottom.
** Total area covered by air grilles in fire doors must not exceed 0.66m².

Installation

Ventilation Grilles are exclusively available as a factory fitted component. The Spence Doors production team will install grilles into door leaves in order for them to arrive on-site with no further labour required.

Installation

A ventilation grille installed along kick plates in an industrial office space on a recent Spence Doors projects.

