
Vision Panels

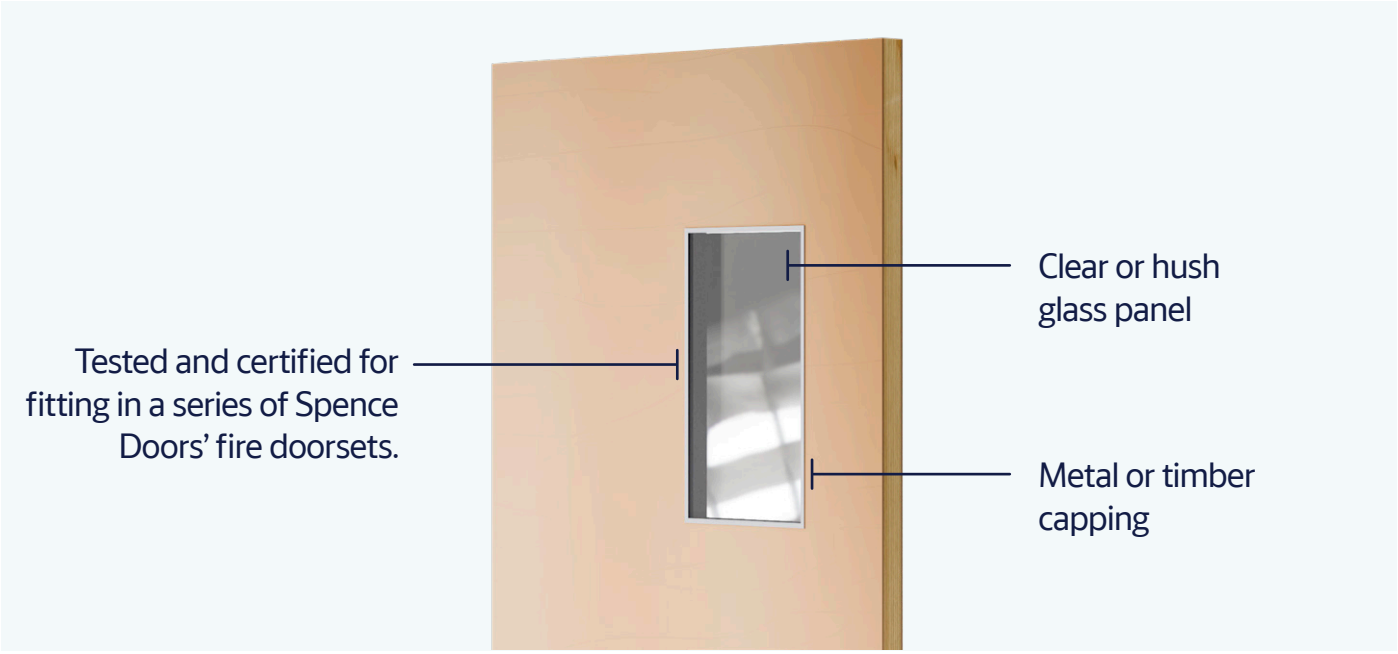

Details

Capping Options:
Aluminium
Timber

Thickness Options*:
6mm
6.38mm
10.38mm

Glass Style Options:
Clear
Hush Clear
Translucent
Laminated

Strength Options:
Standard
Toughened


Door Leaf:
Solid Core only

* Not all widths are available with all profiles.
Talk to our team to find the configuration for your door.

Glazing Bead

Glazing bead along a vision panel's perimeter holds the glass securely in place. The beading also acts as a seal against elements passing through gaps which, in turn, improves insulation qualities.

Spence Doors offer four profiles of glazing bead, each differing in look.
Note this only applies to non-fire-rated doors.

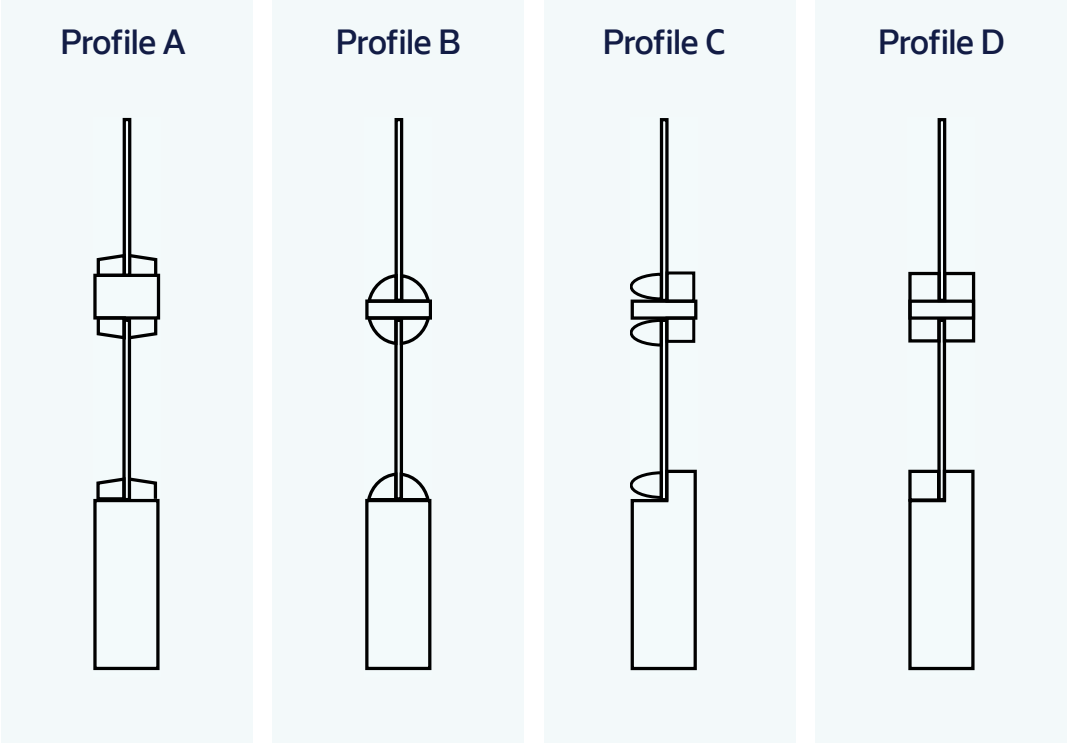

Application in Fire Doors

Spence Doors' Fire-Rated Doorsets are tested and certified to feature vision panels within certain limitations for up to 2 Hours of fire resistance. The maximum area the vision panel can cover in a Spence Doors Fire Door is 65,000mm^2 in accordance with AS1530.4 and AS1905.1.

Options:
13mm clear glass (up to Rw 38 Acoustically Rated)
5mm ceramic glass

Size Options (H x W):
300 x 200
600 x 100

Ceramic Insulating Tape:
Beading on a Fire-Rated Vision Panels features ceramic insulating tape. It is important that this should not be painted over during installation as this can compromise the door set's fire-resistance and intumescent properties.